



SPECIFICATIONS

Overall Width	17 1/2" (44.5 cm)
Overall Height	83 3/8" (211.8 cm)
Overall Depth	24 3/4" (62.9 cm)
Door Clearance at 90°	21 1/4" (53.9 cm)
Door Clearance at 115°	19 1/16" (48.4 cm)
Cutout Width	17 3/4" (45.1 cm)
Cutout Height	84" (213.4 cm)
Cutout Depth	25" (63.5 cm)
Plumbing Requirements	GE SmartConnect kit
Net Weight (approx)	370 lb (167.8 kg)



ATTENTION ELECTRICIAN:

A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. For multiple unit installation, each unit requires separate individually properly grounded circuit or breaker and separate properly grounded 3-prong electrical receptacle recessed.

⚠ WARNING:


When installing appliance, you must use and follow the product installation instructions. These can be found with unit or on web at monogram.com.

OVERALL DIMENSIONS

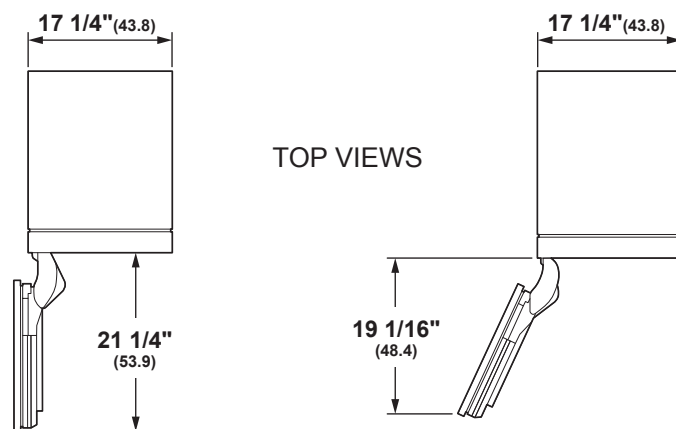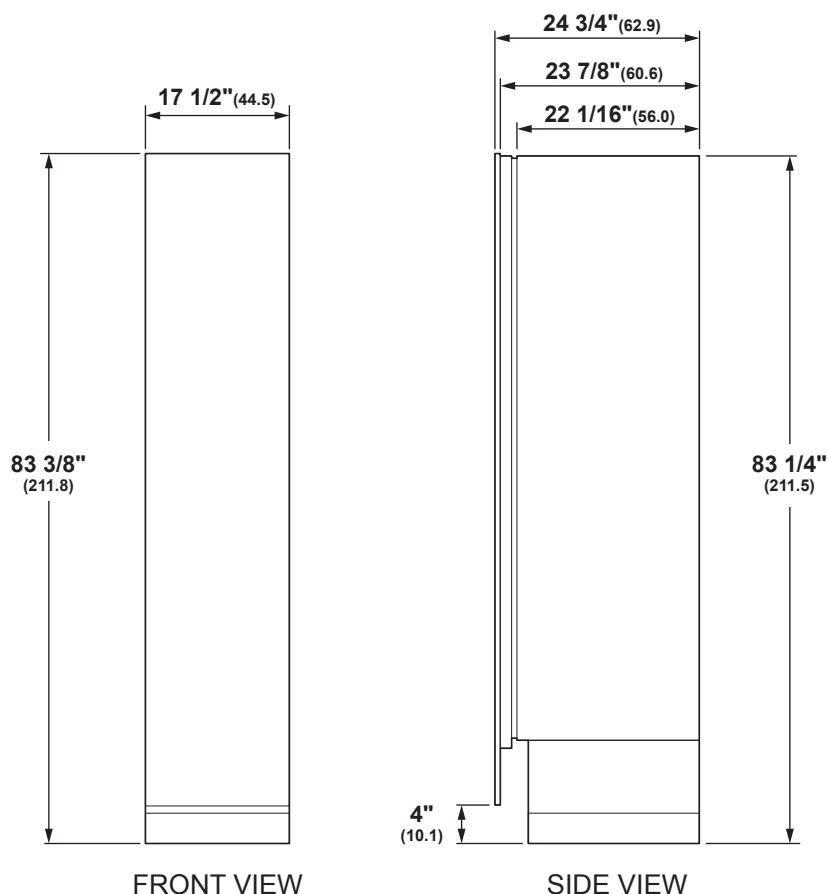

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

FLUSH INSTALLATION

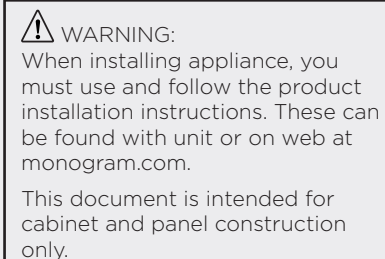

☐ A minimum 3 1/2" (8.9) finished return matching cabinet exterior recommended on interior on all sides and top at front of opening

A diagram of a rectangular door panel. The width is labeled 'A' and the height is labeled 'B'. The text 'Door Panel' is centered within the rectangle.

A	B
17 1/2"	79 7/8"

Trimmed freezers are designed to be customized with decorative panels. Field-installed 3/4" custom door panels are required.

- Door panel – 45 lbs.

Note: For panels constructed with rails and stiles (5-panel), the rails and stiles must be a minimum of 2" wide.

For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.


Door Handles: Custom handles are required for flush installation.

ZKHCSSK: European tubular stainless steel handle designed to fit 3/4" panels. Kit includes one handle - 44 1/4" long.


ZKCSC184: Door panel with European tubular stainless steel handle

ZKCSP184: Door panel with Professional stainless handle


DUAL INSTALLATION
18" INTEGRATED FREEZER, ZIF180NPKII AND
24" INTEGRATED REFRIGERATOR, ZIR240NPKII

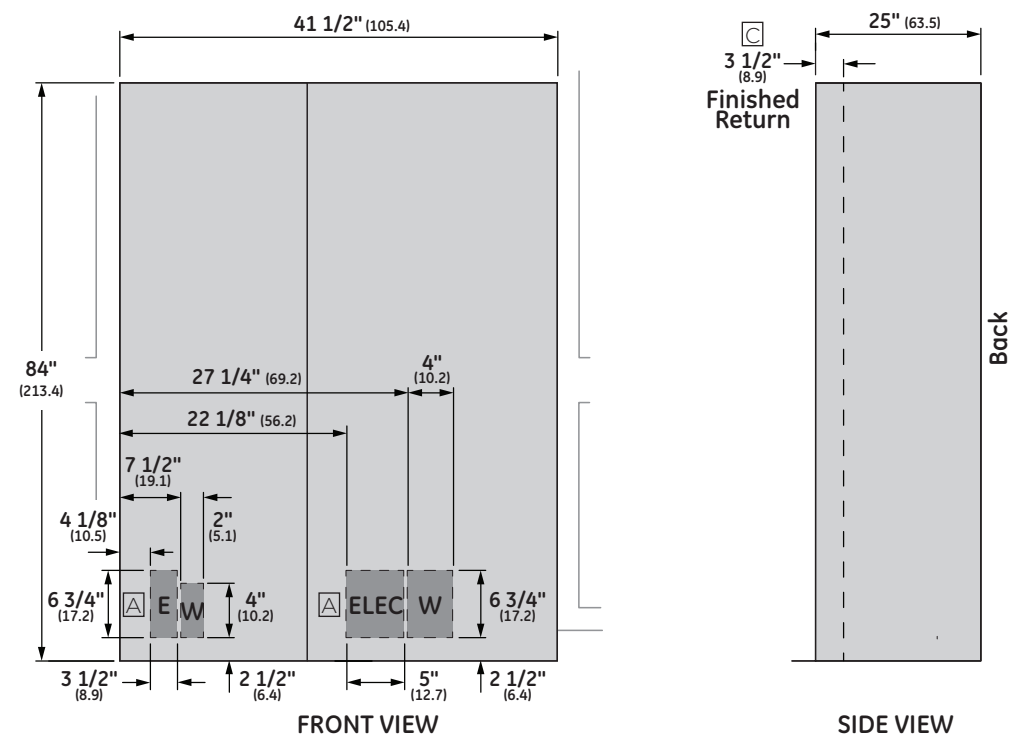

DUAL INSTALLATION
18" INTEGRATED FREEZER, ZIF180NPKII AND
30" INTEGRATED REFRIGERATOR, ZIR300NPKII

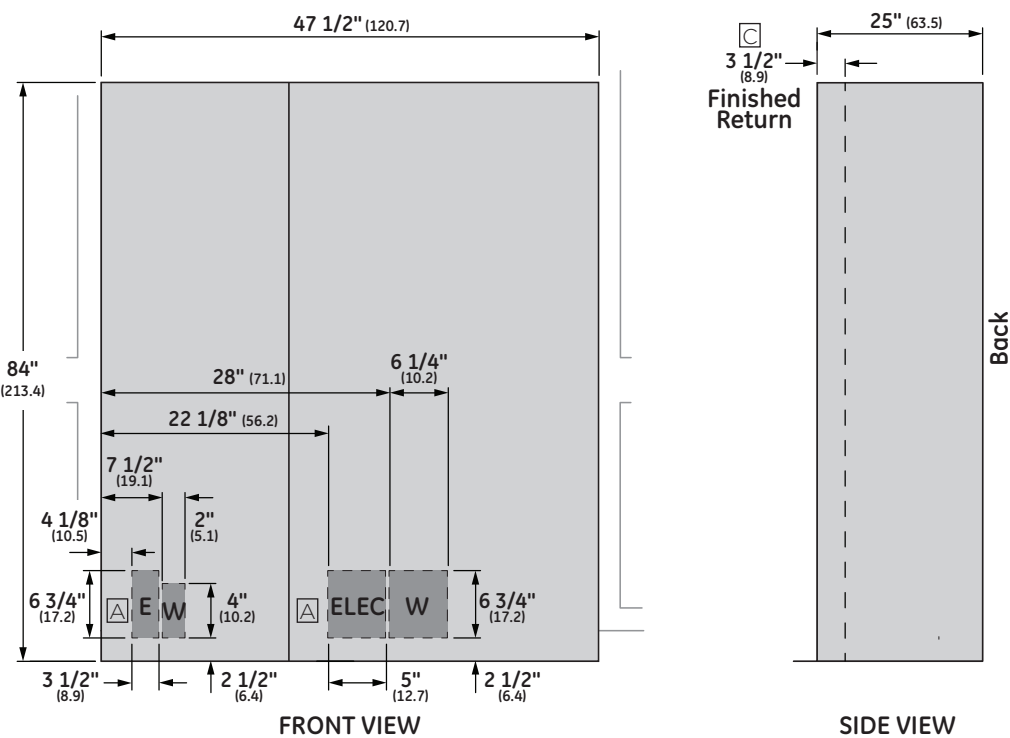


FLUSH 3/4" PANEL DIMENSIONS DUAL INSTALLATION
WITH 18" FREEZER, ZIF180NPKII AND 24" REFRIGERATOR,
ZIR240NPKII

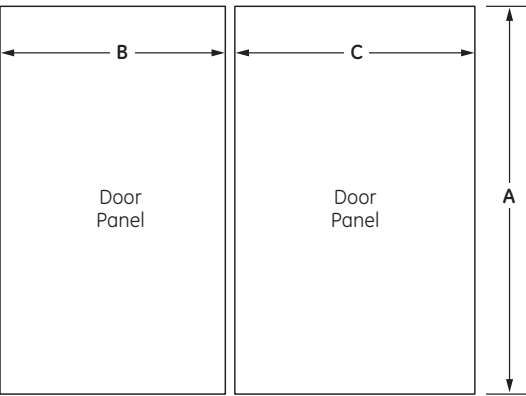

PANEL DIMENSIONS

A	B	C
79 7/8"	17 1/2"	23 1/2"

FLUSH 3/4" PANEL DIMENSIONS DUAL INSTALLATION
WITH 18" FREEZER, ZIF180NPKII AND 30" REFRIGERATOR,
ZIR300NPKII

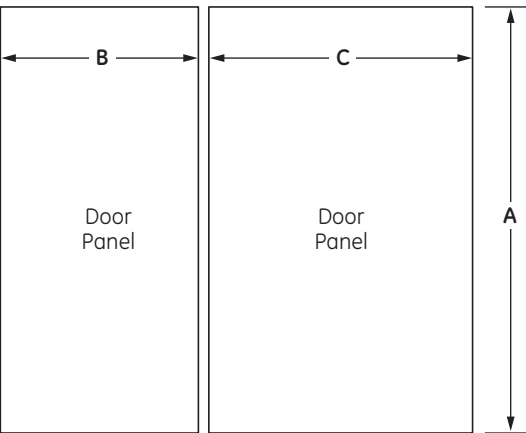

PANEL DIMENSIONS


A	B	C
79 7/8"	17 1/2"	29 1/2"

FLUSH INSTALLATION

NOTES

- Trimmed freezers are designed to be customized with decorative panels. Field-installed 3/4" custom door panels are required.
- Maximum total panel weight: 45 lbs
- Note: For panels constructed with rails and stiles (5-panel), the rails and stiles must be a minimum of 2" wide.
- For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.
- Door Handles: Custom handles are required for flush installation.
- ZKHCSSK: European tubular stainless steel handle designed to fit 3/4" panels. Kit includes one handle - 44 1/4" long.
- ZKCSC184: Door panel with European tubular stainless steel handle for 18" unit
- ZKCSP184: Door panel with Professional stainless handle for 18" unit
- ZKCSC244: Door panel with European tubular stainless steel handle for 24" unit
- ZKCSP244: Door panel with Professional stainless steel handle for 24" unit
- ZKCSC304: Door panel with European tubular stainless steel handle for 30" unit
- ZKCSP304: Door panel with Professional stainless steel handle for 30" unit

DUAL PRODUCT CLEARANCES

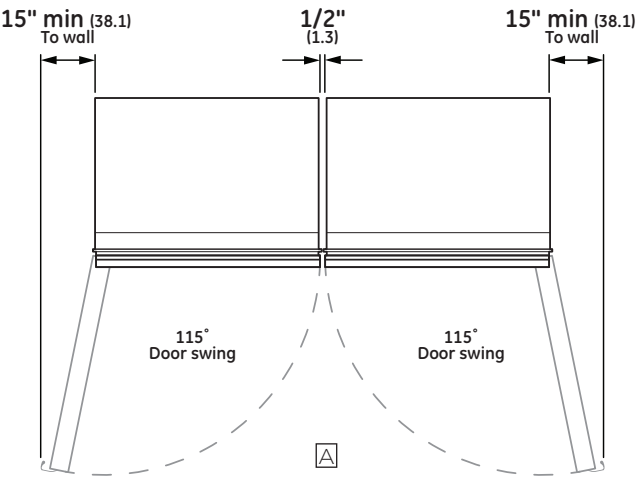

FLUSH INSTALLATION

NOTES

- A** In a side-by-side installation of a left-and-right-hand door swing product, 1/2" clearance between the units is required. Also required is Side-by-Side Heater/ Dual Installation Kit, ZUGC

FEATURES AND BENEFITS

FULLY INTEGRATED COLUMN DESIGN

With concealed hinge offers a look of seamless perfection that installs flush with surrounding cabinetry

PANEL-READY EXTERIOR WITH SIX-WAY ADJUSTABILITY

Accepts stainless steel European- or Professional-style panels ordered separately from Monogram or custom panel & handle from your cabinet maker

RETROFIT CAPABILITY

Allows you to replace a 48" or 42" built-in side-by-side refrigerator with two column refrigerators with no cabinet or electrical modifications

FINELY CRAFTED ADJUSTABLE ALUMINUM DOOR BINS WITH GLASS ACCENTS

Offer easy access to quick-grab items

ADJUSTABLE, HYDROPHOBIC SPILL-RESISTANT GLASS SHELVES WITH INTEGRATED LED LIGHTING

Offer convenience and a clean appearance

REMOTE CONNECTIVITY VIA WIFI

Allows you to wirelessly control freezer settings from your smartphone, using an available app

REMOVABLE ICE STORAGE

Provides quick & easy access to filtered ice

WATER FILTRATION SYSTEM

Supplies you with clean, fresh-tasting ice cubes

SOFT-CLOSE DRAWERS

Smoothly and quietly slide into a secure shut position

UPFRONT, ELECTRONIC-TOUCH CONTROLS

Make it easy to adjust climate settings to create ideal food storage conditions

NIGHT TIME SNACK MODE

Low LED illumination of freezer compartment

NONSLIP MATS IN DOOR BINS AND DRAWERS

Help keep containers in place and simplify cleaning

