

30" M SERIES CONTEMPORARY STAINLESS STEEL HANDLELESS  
CONVECTION STEAM OVEN - PLUMBED



CSOP3050CM/S

FEATURES

The elegant, modern aesthetics pair perfectly with a full suite of similarly styled Sub-Zero, Wolf, and Cove appliances

Contemporary styling features a completely handleless look that incorporates a motorized door system

Plumbed and non-plumbed options for maximum installation flexibility

Full-color touchscreen simplifies use

Save up to 50 personalized favorite recipe presets

Cooking modes include Steam, Convection, Broil, Slow Roast

1750-Watt recessed broil element

2.4 cubic-foot oven cavity allows multiple dishes to be placed side by side at once

1889-Watt dual convection system ensures even, multi-rack baking and consistent results

Three full-extension rack positions and one standard position allow easy access and increased cooking flexibility

The temperature probe alerts you when your dish has reached the desired temperature

ACCESSORIES

Broiler Rack

Descaling Solution

Enameled Broil Pan

Perforated Pan - 12 3/4" x 1 1/2" x 7"

Perforated Pan - 24 3/4" x 1 3/8" x 14 1/2"

Solid Pan - 12 3/4" x 1 1/2" x 7"

Solid Pan - 24 3/4" x 1 3/8" x 14 1/2"

Standard Oven Rack

Temperature Probe

Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).




30" M SERIES CONTEMPORARY STAINLESS STEEL HANDLELESS CONVECTION STEAM OVEN - PLUMBED



PRODUCT SPECIFICATIONS


|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Model                    | CSOP3050CM/S                                                   |
| Dimensions               | 29 7/8"W x 17 7/8"H x 22 1/2"D                                 |
| Oven Interior Dimensions | 25 1/4"W x 10 3/4"H x 15 1/8"D                                 |
| Overall Capacity         | 2.4 cu. ft.                                                    |
| Usable Capacity          | 1.8 cu. ft.                                                    |
| Door Clearance           | 14 3/16"                                                       |
| Weight                   | 91 lbs                                                         |
| Electrical Supply        | 240/208 VAC, 60 Hz                                             |
| Electrical Service       | 20 amp dedicated circuit                                       |
| Drain Line TestSpec      | 10' (3 m) corrugated drain tubing                              |
| Plumbing Supply          | 6.5' (2 m) braided tubing with 3/8" female compression fitting |
| Plumbing Pressure        | 15–145 psi                                                     |
| Conduit Length           | 4 Feet                                                         |

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified


PLUMBING



DIMENSIONS

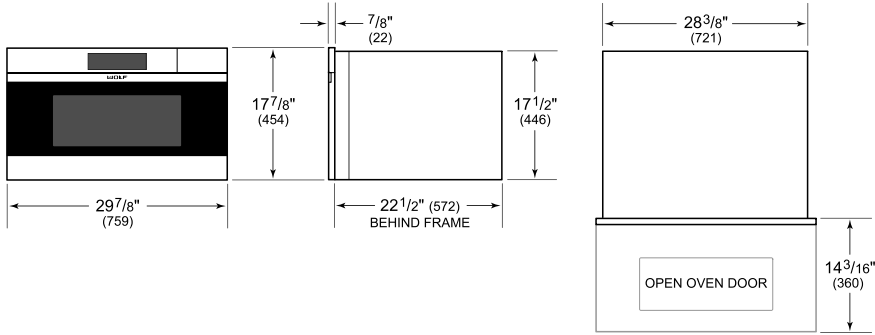

FLUSH INSTALLATION

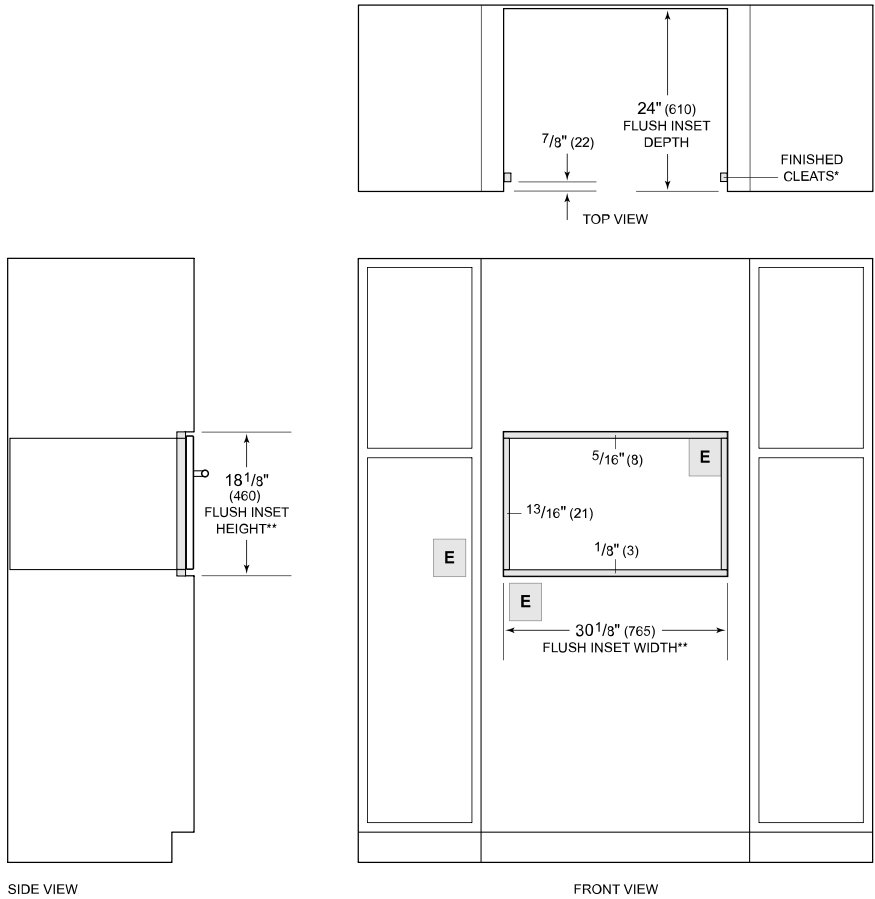

\*Will be visible and should be finished to match cabinetry.  
\*\*Dimension provides minimum reveals.  
NOTE: Location of electrical supply within opening may require additional cabinet depth.