

DO3050PM/S/P



FEATURES

- Cook for a crowd, with two ovens and twice the capacity
- Preheats faster and cooks more consistently across all racks due to its advanced Dual VertiFlow™ convection system
- Assures predictably delicious results with a variety of modes, including Convection Roast, Proof, and Dehydrate
- Prepares 50 popular dishes with the Gourmet feature that automatically adjusts cook times and temperatures
- Handles multiple dishes simultaneously with our largest capacity oven (13 percent larger)
- Insert a temperature probe to tell you exactly when it is done—and in Gourmet Mode, it will alert you the moment the dish is ready.
- Uncomplicate cooking with innovative, interactive color touchscreen controls
- Choose knobs in iconic red, black, brushed stainless, brushed brass, or brushed gray
- Integrates beautifully into surrounding cabinetry with flush installation
- Ensures excellent visibility via three bright halogen lights and large, triple-panel-glass door windows
- Master your technique with tips and recipes from the Mastering the M Series Oven guide

ACCESSORIES

- 30" Broiler Pan
- 30" Full-Extension Ball-Bearing Oven Rack
- 30" Premier Baking Sheet
- 30" Standard Oven Rack
- Bake Stone Kit
- Dehydration Kit
- Multi-Function Pan
- Temperature Probe
- Red, black, brushed stainless, brushed brass, and brushed gray knob kits
- Accessories available through an authorized dealer. For local dealer information, visit [subzero-wolf.com/locator](https://subzero-wolf.com/locator).



KNOB OPTIONS






PRODUCT SPECIFICATIONS


|                            |                                |
|----------------------------|--------------------------------|
| Model                      | DO3050PM/S/P                   |
| Dimensions                 | 29 7/8"W x 50 7/8"H x 23"D     |
| Oven 1 Interior Dimensions | 25 1/4"W x 17 1/2"H x 19 7/8"D |
| Oven 2 Interior Dimensions | 25 1/4"W x 17 1/2"H x 19 7/8"D |
| Overall Capacity           | 5.1 cu. ft.                    |
| Usable Capacity            | 3.3 cu. ft.                    |
| Door Clearance             | 21 3/8"                        |
| Electrical Supply          | 240/208 VAC, 60 Hz             |
| Electrical Service         | 50 amp dedicated circuit       |
| Conduit Length             | 5 Feet                         |

ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

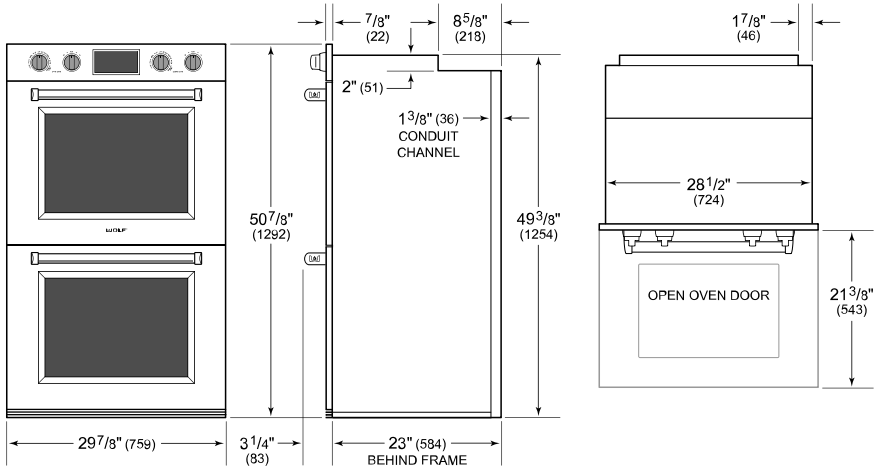

FLUSH INSTALLATION

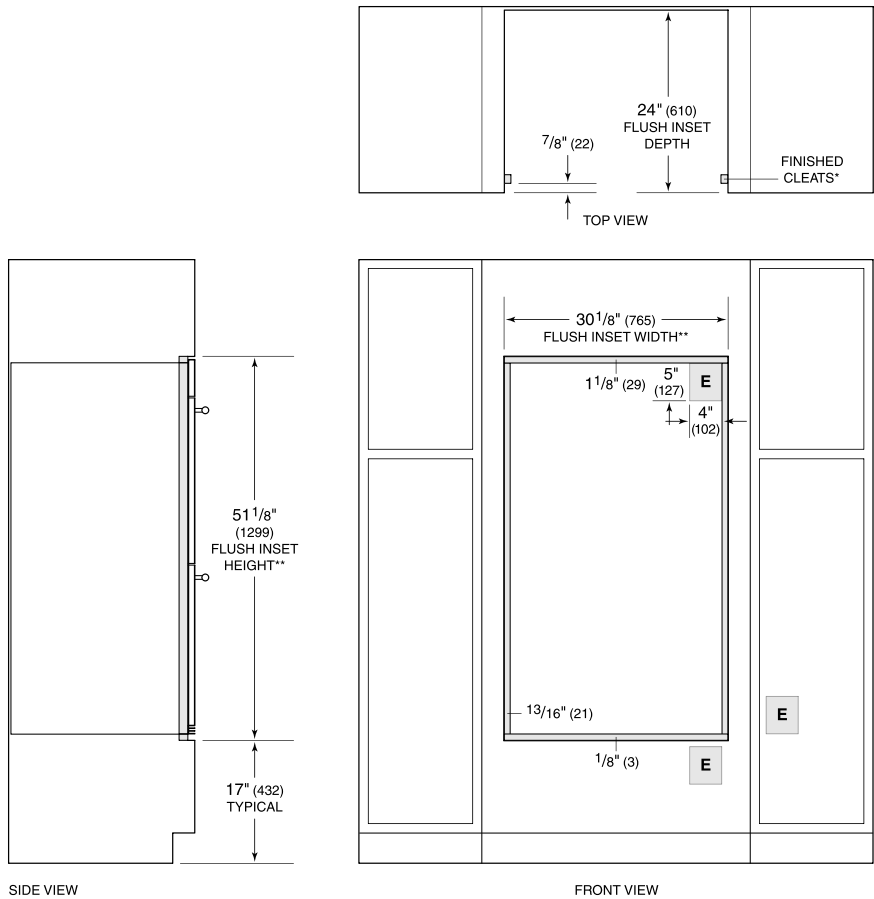

\*1" (25) minimum depth. Shaded areas will be visible and should be finished to match cabinetry.  
\*\*Dimension provides minimum reveals.  
**NOTE:** Location of electrical supply within opening may require additional cabinet depth.